


2D1

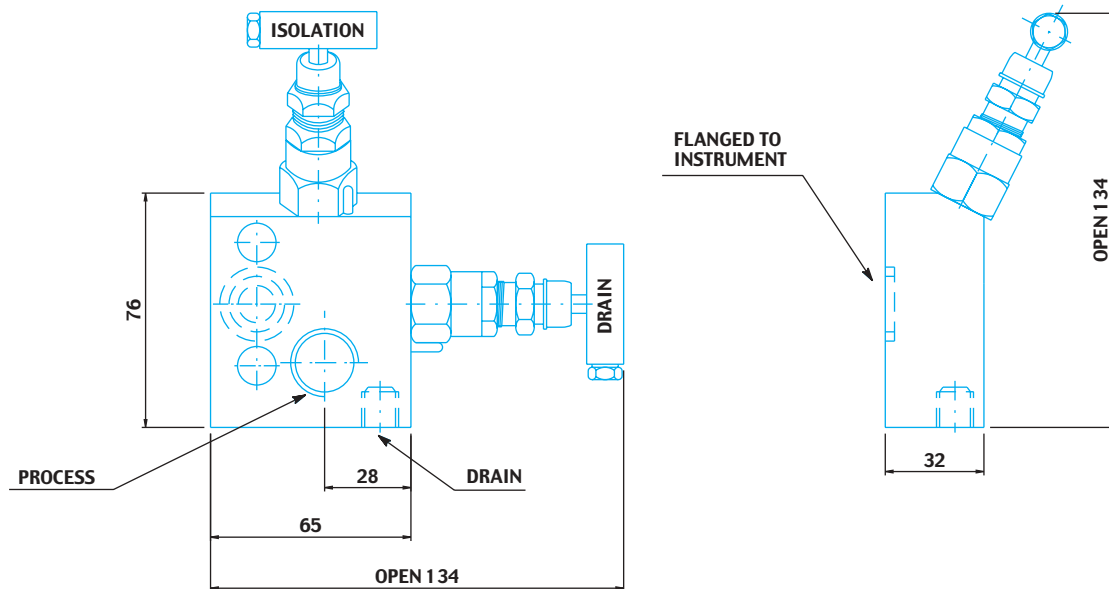

Description:	2 valves manifold – direct mounting
Descripción:	Manifold 2 valvulas – montaje directo
Description:	Manifold 2 vannes – montage direct
Connections:	Process: 1/2" NPT-F Instrument: flanged (direct mounting) Drain: 1/4" NPT-F + plug
Conexiones:	Proceso: 1/2" NPT-F Instrumento: bridada (montaje directo) Purga: 1/4" NPT-F + tapon
Connections:	Process: 1/2" NPT-F Instrument: bridè (montage direct) Purge: 1/4" NPT-F + bouchon
Pressure rating:	
Presion de servicio:	6000 psi
Pression:	

Material:	
Material:	A105, AISI 316/L, Monel, Hastelloy, ...
Materiaux:	
Gland Packing:	PTFE (for temperature up to 180 °C) Graphoil (for temperature over 180 °C)
Estopada:	PTFE (para temperatura hasta 180 °C) Graphoil (para temperatura mas de 180 °C)
Guarniture:	PTFE (pour temperature jusqu'à 180 °C) Graphoil (pour temperature plus de 180 °C)
Accessories:	Q.ty 2 7/16" UNF mounting bolts
(included)	Q.ty 1 PTFE sealing ring
Accesorios:	C.tad 2 7/16" UNF bulones de montajes
(incluido)	C.tad 1 PTFE junta de sello
Accessoires:	Q.tè 2 7/16" UNF boulon d'assemblage
(inclus)	Q.tè 1 PTFE joints de brides

Model:	
Modelo:	2D1
Modelè:	