
COME ORDINARE

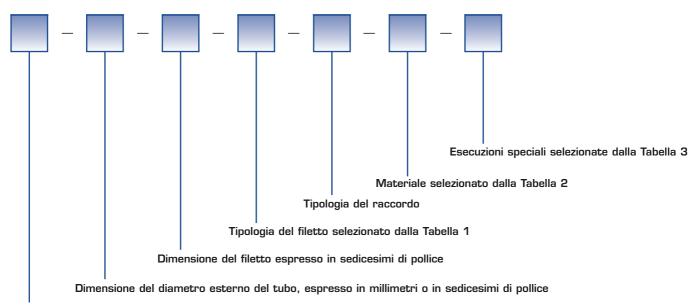

Selezionare M per raccordi metrici o P per raccordi in pollici

TABELLA 1

NO SUFFIX = NPT ANSI B1.20.1

 $\mathbf{K} = \mathsf{BSPP} \ \mathsf{ISO} \ \mathsf{228/1}, \ \mathsf{BS} \ \mathsf{2779}, \ \mathsf{DIN} \ \mathsf{3852} \ \mathsf{Form} \ \mathsf{A}$

W = BSPP ISO 228/1, BS 2779, DIN 3852 Form B

J = BSPT ISO 7/1, BS 21, DIN 2999

TABELLA 3

FB = Raccordo per termocoppia

Z = Raccordo sgrassato per uso ossigeno

TABELLA 2

NO SUFFIX = 316

L = 316L

0 = OTTONE

MO = MONEL

TI = TITANIO

H = HASTELLOY

I = INCONEL

