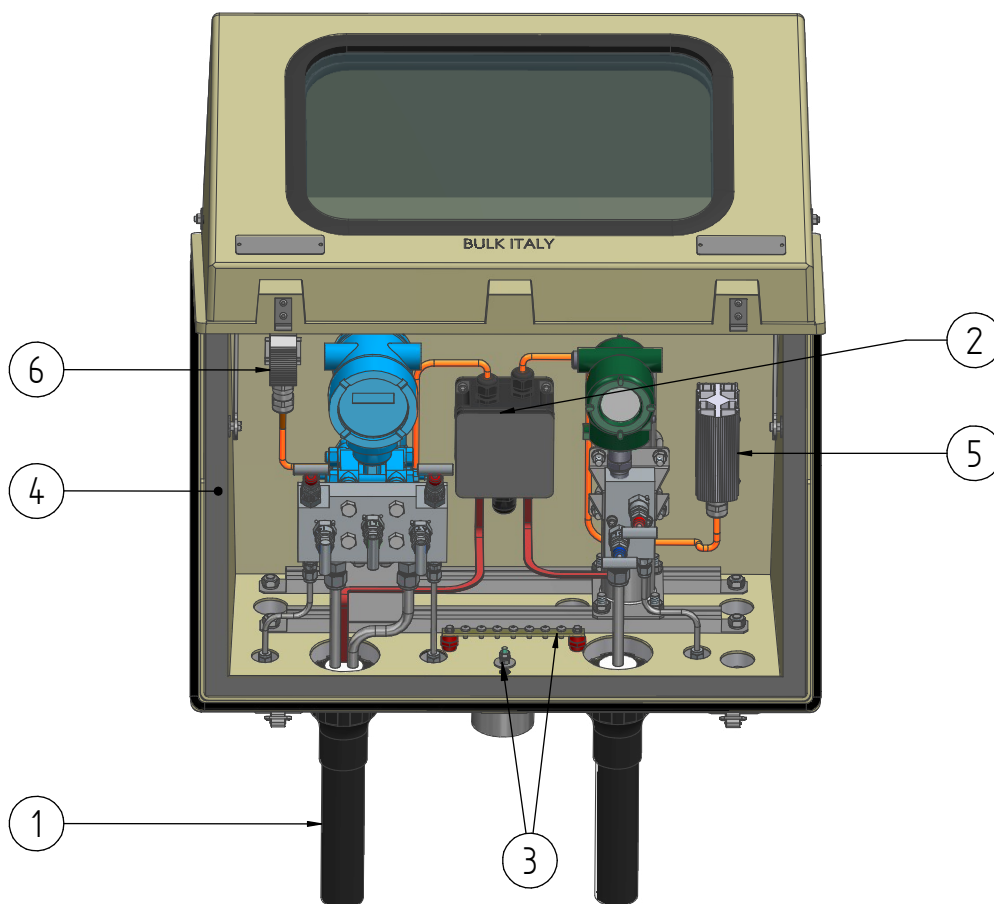


HEATING & INSULATION

**1. Heat-shrinkable**

Suitable for preinsulated and pretraced tubing. Material and dimensions are defined according to the application.

2. Junction boxes

They can be supplied in various materials, including: polypropylene, fiberglass, stainless steel and aluminium alloys. Junction boxes can be supplied complete with relative cable glands, terminals and switch. Explosion proof or standard execution for safe area available.

3. Earth screw or earth bar

Enclosures for hazardous area are supplied with earth screw/earth bar.

4. Thermal insulation

Enclosures can be provided with thermal insulation made from two sheets of GRP enclosing a 20 mm inner layer of PU-FOAM (known as "SANDWICH TYPE").

5. Electrical heaters

Electrical heaters made from anodised aluminium profile, are suitable for installation in Ex or safe area. Available with thermostat or self-regulating. Power consumption from 50 W to 150 W.

6. Thermostat

Electrical heaters can be equipped with thermostat at fixing temperature set. In-line version is also available. They are suitable for installation in Ex or safe area.