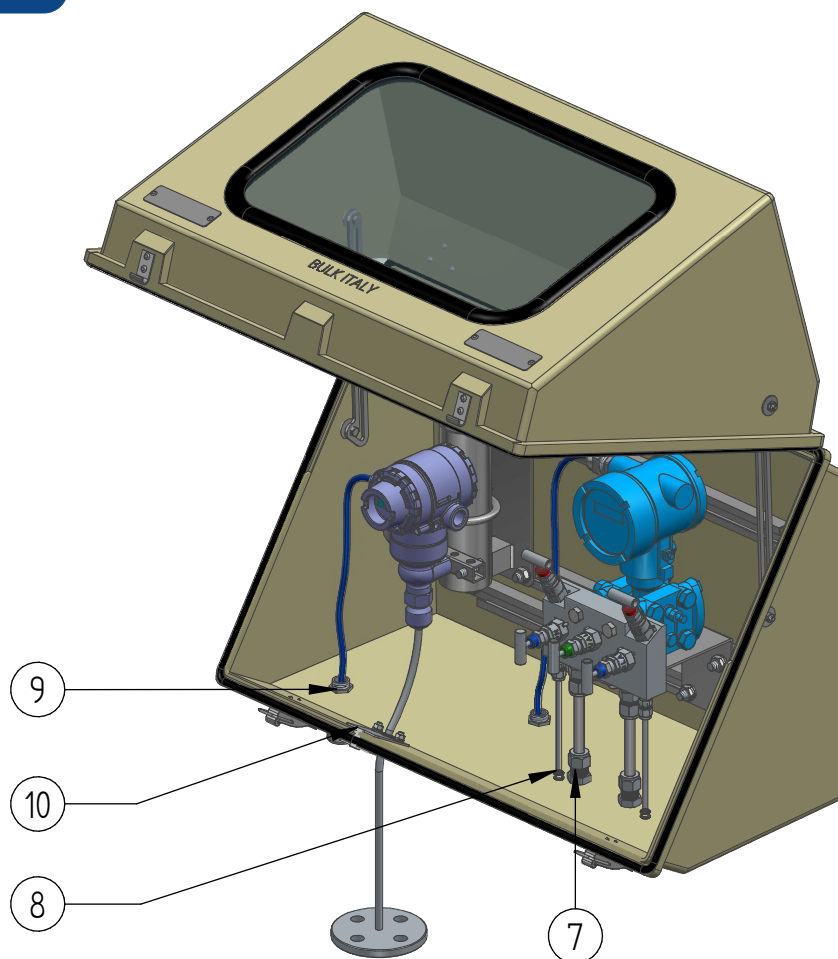


IN-OUT CONNECTIONS

7. Bulkhead twin ferrule compression fittings

Size from 1/4" o.d. to 1/2" o.d., from 6 mm o.d. to 16 mm o.d. in AISI 316/L.

8. Rubber grommets

Standard material of construction TPE (-50°C + 100°C). Suitable for entry of tubing, piping or cable.

9. Cable glands

Material of construction: polyamide, brass, nickel plated brass, AISI 316. Available for armoured (double seal) or not armoured cable (single seal). Explosion proof or standard execution for safe area available.

10. Capillary plate

In case of application with capillary impulse line, a special plate should be use.

Size and dimensions are made to fit customer's requirement.