


DOUBLE FERRULE COMPRESSION FITTINGS

THREADED FUSIBLE PLUG PFT (NPT THREAD)

bulk

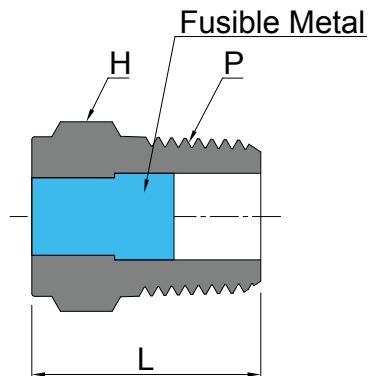

PFT SERIES

PART No.	P	L	H (HEX)	Melting temperature
	NPT	mm	mm	°C
P-4-PTF-71	1/4"	24.1	14.28	71
P-4-PTF-124	1/4"	24.1	14.28	124
P-4-PTF-138	1/4"	24.1	14.28	138
P-6-PTF-71	3/8"	25.1	17.46	71
P-6-PTF-124	3/8"	25.1	17.46	124
P-6-PTF-138	3/8"	25.1	17.46	138

Maximum working pressure is 250 psig (17.3 bar)