



bulk

BULK ITALY
Type 125

MADE IN ITALY

GRP SUNSHADES



INSTRUMENT SUNSHADE SERIE SSN

125N SERIE SSN

MODEL: 125N



ATEX 2014-34-UE
CU TR 012/2011

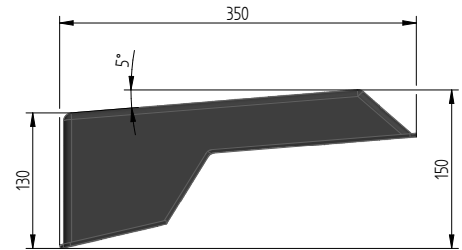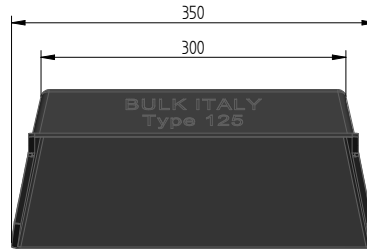

Technical characteristics

- Instrument protection sunshade made in hot pressed GRP (Glassfibre Reinforced Polyester)
- Antistatic material (surface resistance \leq of $10^9 \Omega$)
- External dimensions in mm: 300/350 (width) x 350 (depth) x 130/150 (height)
- Average thickness 3 mm
- Weight in kg: 1 (without accessories)
- Black color
- Working temperature range: $-60^\circ\text{C} + 100^\circ\text{C}$

Resistant to most corrosive types of environments

- UV resistant in according to EN 60079
- Positively tested Sand and Dust Procedure II - Blowing sand in according to MIL-STD-810G METHOD 510.5
- Positively tested to Salt Mist Corrosion
- Positively tested in wind tunnel up to 160 km/h

Hardly inflammable and self-extinguishing

- "V-0" classification in according to UL 94 June 2009
- Determination of burning behavior by oxygen index in according to UNI EN ISO 4589-2: 30,5% Oxygen Index
- Classification of fire behavior in according to DIN 4102-1:1998: CLASS B2

Conformity to hazardous area directive

- ATEX 2014-34-UE
- II 2G Ex h IIC T6 Gb X
- II 2D Ex h IIIC T85°C Db X
- CU TR 012/2011
- II Gb T6 X
- III Db T85°C X
- $-60^\circ\text{C} \leq T_a \leq +100^\circ\text{C}$

Options/accessories:

- 2" pipe stand



HOW TO ORDER:

SUNSHADE SERIE	MATERIAL	TYPICAL ASSEMBLY	MOUNTING BRACKET MATERIAL	HOLES FOR BRACKET	PAINTING	CERTIFICATION
125	N : GRP ANTISTATIC BLACK	SELECT FROM BELOW	A: ZINC COATED STEEL	C: REQUIRED	01: NO PAINTING	A: ATEX
			B: AISI 316			
			Z: NO MOUNTING BRACKET	S: NOT REQUIRED	(*)	D: EAC CU TR 012/2011 COMPLIANCE

(*) Painting on demand

125N SERIE SSN

EXAMPLE HOW TO ORDER: 125N**00112**BC01A

GRP SUNSHADES MODEL 125 ANTISTATIC BLACK C/W 2" mounting bracket made in AISI 316 and holes, without painting, certified ATEX

<p>TYPICAL ASSEMBLY 00000 WITHOUT HOLES AND MOUNTING BRACKETS</p>	<p>TYPICAL ASSEMBLY 00112 2" PIPESTAND EXTERNAL MOUNTING</p>	<p>TYPICAL ASSEMBLY 00212 2" PIPESTAND INTERNAL MOUNTING</p>
<p>TYPICAL ASSEMBLY 00312 WALL/RACK MOUNTING</p>	<p>TYPICAL ASSEMBLY 00512 DOUBLE 2" PIPESTAND INTERNAL MOUNTING</p>	<p>TYPICAL ASSEMBLY 00612 WALL MOUNTING</p>
<p>TYPICAL ASSEMBLY 00712 DOUBLE 2" PIPESTAND EXTERNAL MOUNTING</p>	<p>TYPICAL ASSEMBLY 00812 2" PIPESTAND INTERNAL MOUNTING WITH MULTIPLE HOLES MOUNTING BRACKET</p>	<p>TYPICAL ASSEMBLY 00912 SELF STANDING MOUNTING BRACKET ON INSTRUMENT'S NECK</p>
<p>TYPICAL ASSEMBLY 01012 SELF STANDING MOUNTING BRACKET ON INSTRUMENT'S HEAD</p>	<p>TYPICAL ASSEMBLY 01112 SELF STANDING FOLDING MOUNTING BRACKET ON INSTRUMENT'S NECK</p>	<p>TYPICAL ASSEMBLY 01212 MESC SHELL MOUNTING BRACKET</p>